

深圳市华科百誉科技有限公司

TFT-LCD module

Module (型号):	HK-B801I-21C-31P
Customer (客户):	
Customer P/N (客户型号):	

If there is no special request from customer, SHENZHEN FEIGEDA ELECTRONIC CO.,LTD will not reserve the tooling of the product under the following conditions:

1. There is no response from customer in one years after SHENZHEN FEIGEDA ELECTRONIC CO.,LTD submit The samples;
2. There is no order in one years after the latest mass production. And completed data (include quality record) will be reserved one year more after tooling was discarded.

Approved by (批准):	
Qualified (合格):	Unqualified (不合格):

PREPARED	CHECKED	APPROVED

Contents

1. General Description 3

2. Physical Features 3

3. Mechanical Specification 3

4. Outline Dimension 4

5. Absolute Maximum Ratings 4

6. Electrical Characteristics 4

7. Module Function Description 6

8. Backlight Characteristics..... 8

9. Records Of Version 11

华科光电

1. General Description

KW-B801I-21C-31P is a transmissive type a-Si TFT-LCD (amorphous silicon thin film transistor liquid crystal display) module, which is composed of a TFT-LCD panel, a driver circuit and a backlight unit. The panel size is 10.1 inch and the resolution is 800*1280, the panel can display up to 16.7M colors. The LCM can be easily accessed by micro-controller via MIPI interface.


2. Physical Features

Display Mode	TFT-LCD Module
	Active matrix TFT, Transmissive type
Display Format	Graphic 800×RGB×1280 Dot-matrix
Input Data	MIPI Interface
Viewing Direction	IPS
Drive	TBD

3. Mechanical Specification

Item	Contents	Unit
Module size (W×H×T)	114.6×184.1×2.60 (Type.)	mm
Number of dots	800(RGB) × 1280	---
Active area (W×H)	107.64(H)×172.22(V)	mm

4.Outline

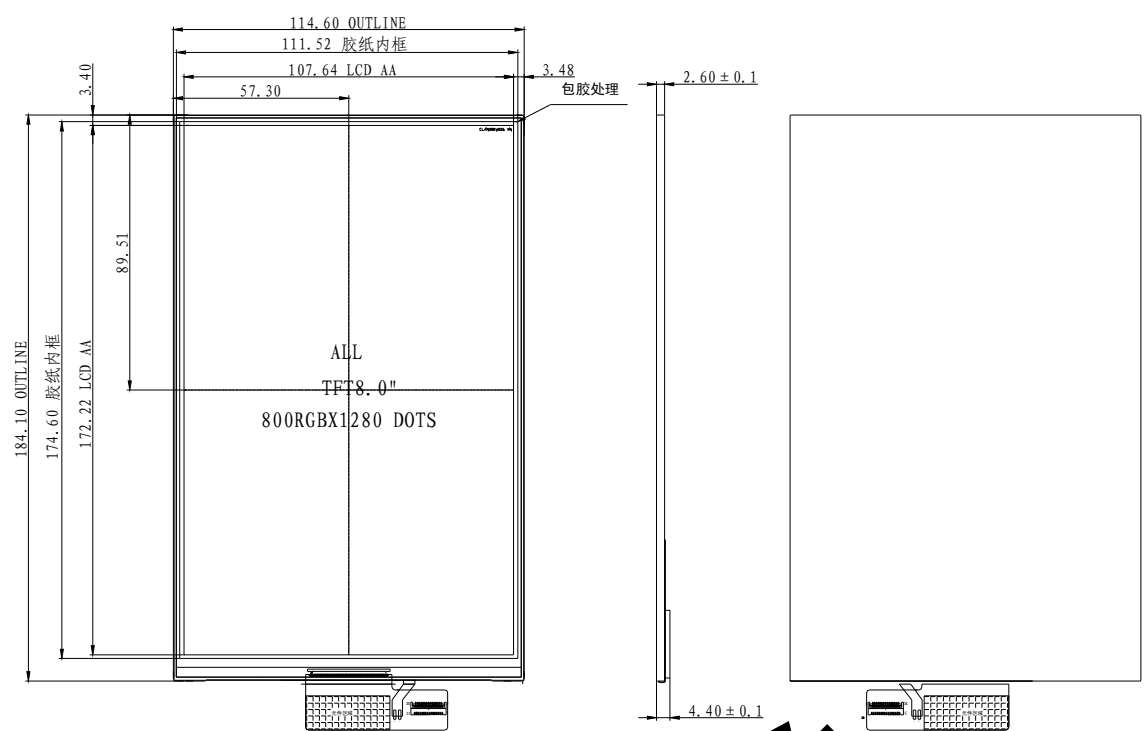

5. Absolute Maximum Ratings

Item	Symbol	Min	Max	Unit	Remark
Power Voltage	VDD	-0.3	3.6	V	Note1、 Note2
Input Voltage	VIN	-0.3	VCC+0.3	V	
Operating temperature	TOP	-10	50	℃	
Storage temperature	TSTR	-10	60	℃	
Humidity	---	---	90	%RH	---

6. Electrical Characteristics

Item	Symbol	Rating			Unit	Remark
		Min	Typ	Max		

Power Voltage	ALogic	VDD	2.8	3.3	3.6	V	
Power Voltage	Logic	VDDIO	1.8	1.8/3.3	3.6	V	
Input Voltage	L level	VIL	-0.3	----	0.2*VCC	V	
	H level	VIH	0.8* VDD	---	---	V	
LCD Drive Power current		ILCD	---	---	---	mA	---


Remark:

Note1:Vcom must be adjusted to optimize display quality: Cross-talk, Contrast Ratio and etc.

华科百科

7. Module Function Description

7-1. Pixel Fomat

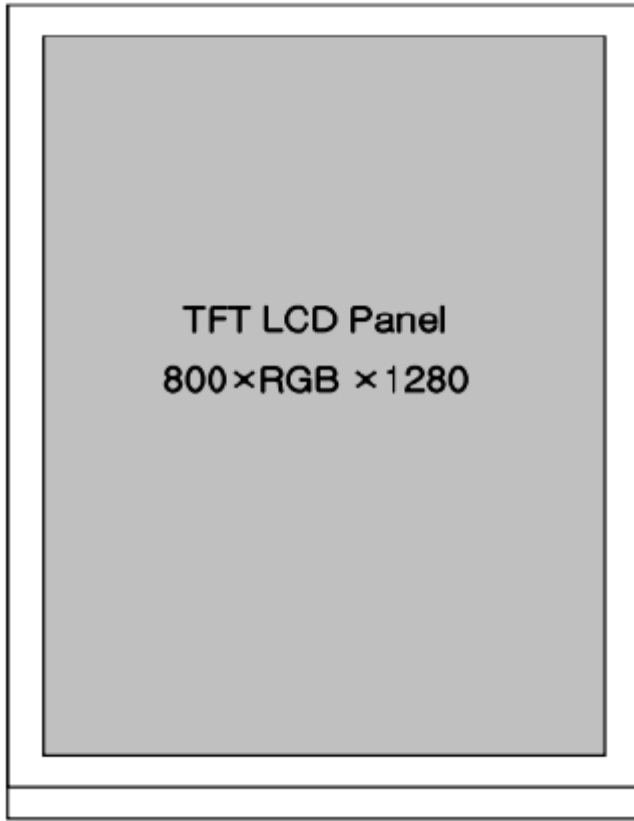

华科百润


7-2. Pin Description

PIN NO	SYMBOL	Description
1-3	LEDA	LED Anode
4	NC	OPEN
5-8	LEDK	LED Cathode
9-10	GND	Ground
11	D2P	MIPI data input.
12	D2N	MIPI data input.
13	GND	Ground
14	D1P	MIPI data input.
15	D1N	MIPI data input.
16	GND	Ground
17	CLKP	MIPI clock input.
18	CLKN	MIPI clock input.
19	GND	Ground
20	D0P	MIPI data input.
21	D0N	MIPI data input.
22	GND	Ground

23	D3P	MIPI data input.
24	D3N	MIPI data input.
25	GND	Ground
26	VDDIO	Power SUPPLY 1.8V
27	RESET	Global reset signal
28	GND	Ground
29	VDDIO	Power SUPPLY 1.8V
30-31	VDD	Power SUPPLY 3.3V

8. Backlight Characteristics

Item	Symbol	Min	Typ	Max	Unit	Remark
Forward voltage	V_{BL}	9.0	9.6	10.0	V	-
Current	I_{BL}	-	140	-	ma	-
ICE	X	0.26	-	0.32	-	-
	Y	0.26	-	0.32	-	-
Brightness	-		-	-	cd/m ²	★1
Uniformity	-	80	-	-	%	★2

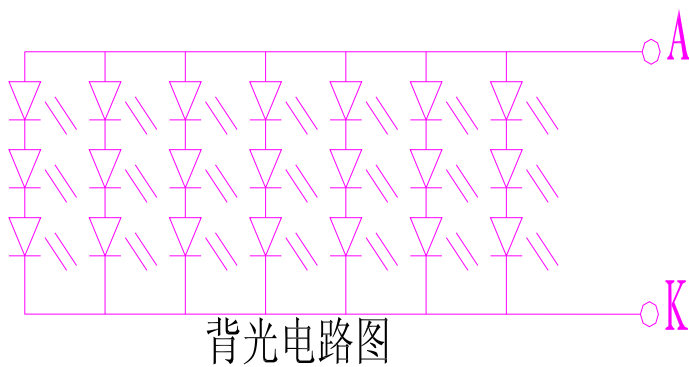


★1 Test condition is :

- (a) Center point on active area
- (b) Best Contrast

★2 Uniform measure condition :


- (1) Measure 9 point. Measure location is show below :
- (2) $Uniform = (Min. brightness / Max. brightness) \times 100\%$
- (3) Best Contrast

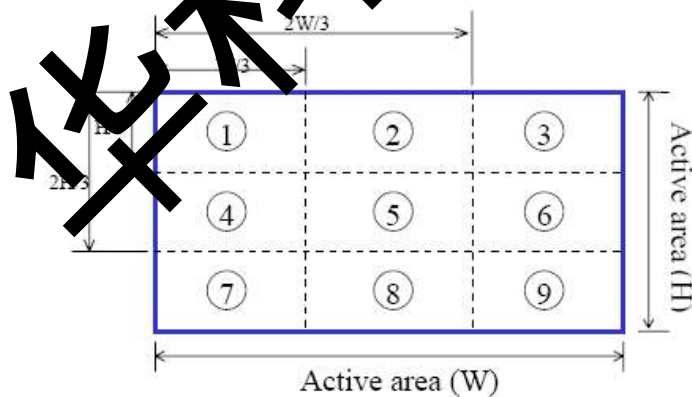

9. Electro-Optical Characteristics

Item		Symbol	Condi on	Min.	Typ.	Max.	Unit	Remark
Response time		Tr +Tf	$\theta x = \theta y = 0$	---			ms	Reference Only
Contrast Ratio		CR		150	250	---	---	
Transmittance		T%		---	6.3	---	%	
Color chromaticity	white	Wx					-	
		Wy						
	Red	Rx						
		Ry						
	Gree n	Gx						
		Gy						
	Blue	Bx						
		By						
Viewing angle	Hor.	$\theta x+$	$CR \geq 10$	---	85	---	Deg.	
		$\theta x-$		---	85	---		
	Ver.	$\theta y+$		---	85	---		
		$\theta y-$		---	85	---		


Note (1) Definition of Viewing Angle x and y:

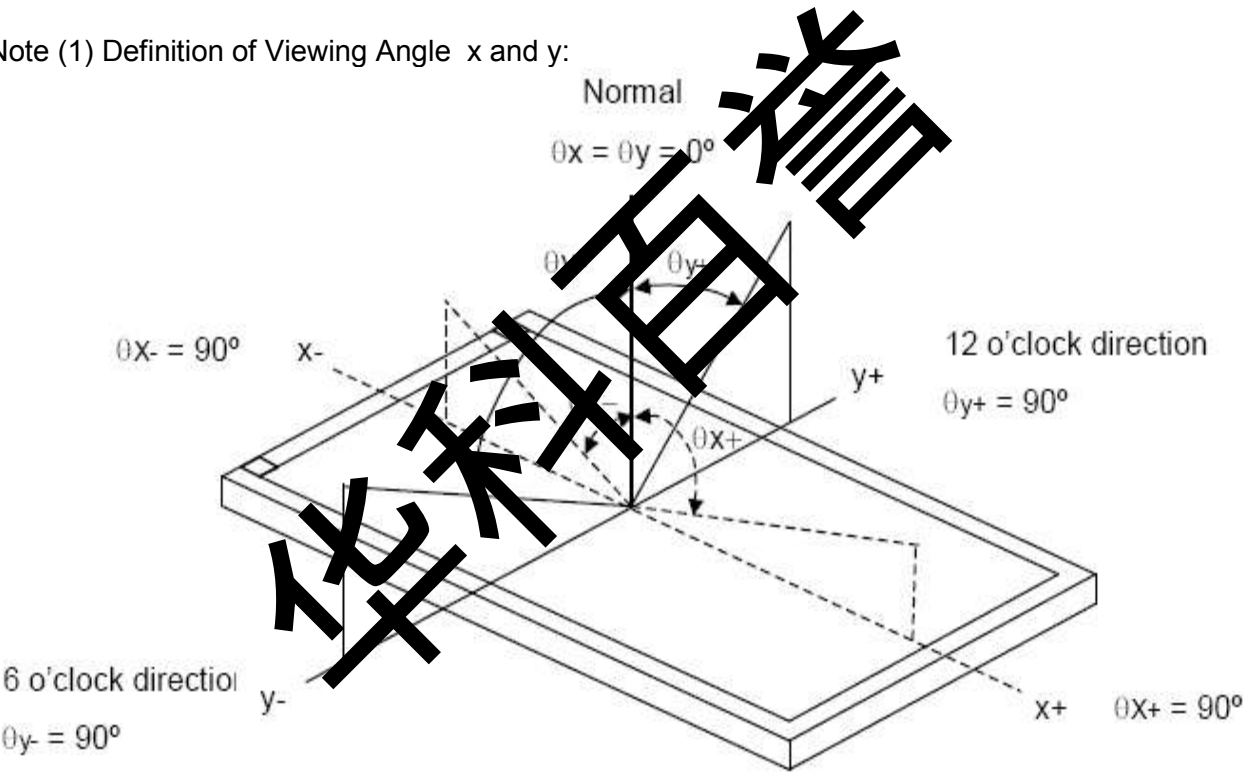


Note (2) Definition of Contrast Ratio(CR) :
measured at the center point of panel

$$CR = \frac{\text{Luminance with all pixels white}}{\text{Luminance with all pixels black}}$$

Note (3) Definition of Response Time : Sum of T_R and T_F

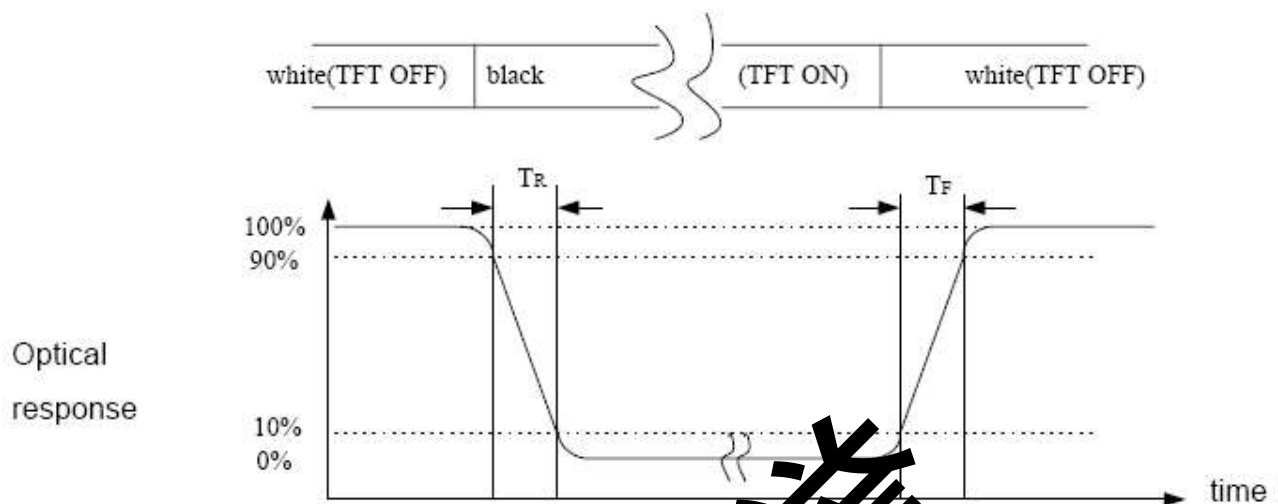

Note (4) Definition of optical measurement setup

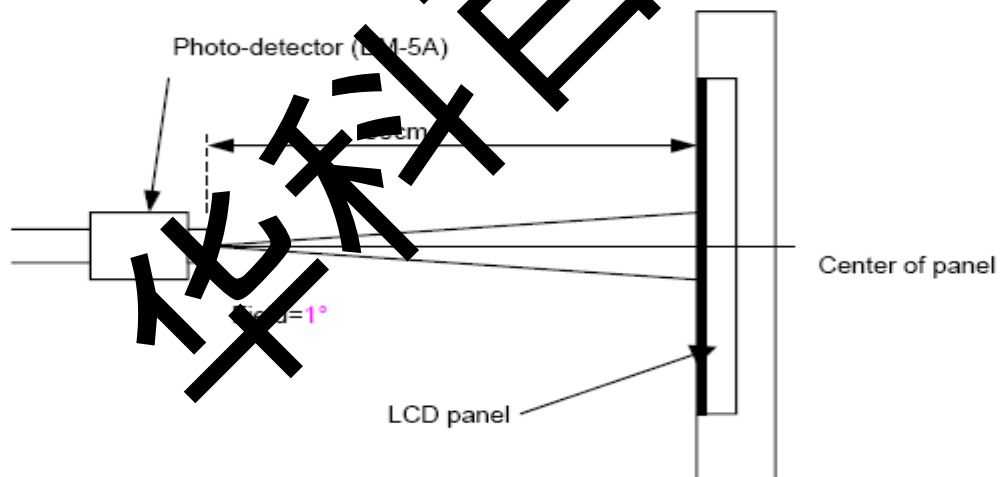

9. Records Of Version

Version	Revise Date	Page	Content
0.0	20160113	All	zy

华科百读